


OPERATING RANGE: mm



The adjustable one piece offset boom system found on the TB28FR allows for maximum unobstructed digging depths and fast cycle times even when positioned in the fully offset position. Competitive "Zero swing machines" are equipped with cumbersome, multi-part, high maintenance two-piece knuckle boom systems which greatly restrict digging depths when operated in the offset position.

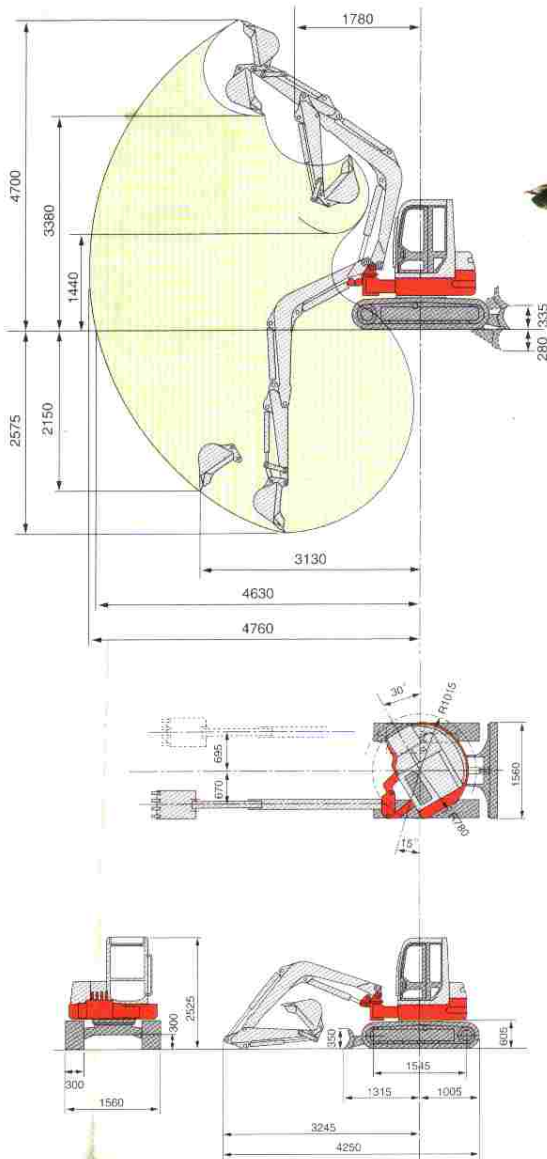

The excavator's spacious operator's compartment with a large comfortable seat provides for hours of fatigue-free operation.



When the excavator's adjustable boom is placed in the fully offset position, the operator may position himself close to the trench for unobstructed visibility and control.

SPECIFICATIONS TB28FR Cab, Rubber Tracked, Breaker Pippings Standard (Tops/ Fops cabin/ canopy)

WEIGHT: kg		Rear Slew Radius	780	OPERATING RANGE: mm	
Machine Weight	3,095(cabin) 3,010(canopy)	Min. Ground Clearance	300	Max. Dig. Depth	2,575
BUCKET		PERFORMANCES			
Bucket Capa.	m ³ 0.068(SAE, Heaped)	Traction Speed	km/h 2.3/4.1	Max. Vertical Dig. Depth	2,150
Bucket Width	mm 460	Upper Slew Speed	min ⁻¹ 9.6	Max. Dump Height	3,380
DIESEL ENGINE (WATER-COOLED)		Gradeability	deg/% 30° / 58%	Max. Dig. Height	4,700
Model	3TNE82A	Max. Dig. Power Bucket	kN 21.9	Max. Dig. Radius	4,760
Type	4CYCL, 3CYL, Direct Injection	Arm	kN 15.46	Max. Floor Dig. Radius	4,630
Rated Output	kW 16.8/2,300min ⁻¹	Ground Press	kPa 30.4(cabin) 29.6(canopy)	Min. Slew Radius	1,805(On Boom offset: 1,015)
Max. Torque	Nm 84Nm	DOZER BLADE: mm		HYDRAULIC SYSTEM	
Displacement	ml 1,330	Width x Height	1,560x350	Pump	Type 2xVariable Piston Pump + 2xGear Pump
Cool Water Capa.	lit 4.5	Operating Range up/down	335/280	Set Press	MPa 20.6x2+19.6+3.4
Lub. Oil Capa.	lit 2.7-3.9	OFF-SET DIG FUNCTION		Discharge	l/min 29.0x2+19.8+10.4
Fuel Tank Capa.	lit 35	Type	Boom Offset	Breaker & Servis Port	l/min 56.8
OVERALL DIMENSIONS: mm		Swing Angle	RH/LH 15/30	Slew Motor	Axial Piston
Length (in transport)	4,250	TRACTION SYSTEM: mm		Traction Motor	Axial Piston
Width	1,560	Crawler (Track)	Rubber	Hydraulic Tank Capa.	lit 43.5
Height	2,525(cabin) 2,550(canopy)	Track Width	300		

WORLD CREATOR OF COMPACT EXCAVATOR

TAKEUCHI MFG.CO.,LTD.

205-3,Uwadaira, Sakaki-machi, Hanishina-gun,
Nagano 389-0605, Japan
Phone (81)268-81-1112
Telefax (81)268-81-1121
URL <http://www.takeuchi-mfg.co.jp>
E-mail: marketing@takeuchi-mfg.co.jp

